


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/22/09'	~	

N=NUMBER OF CONTACTS/2


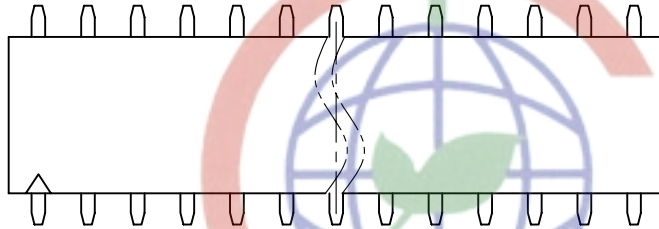


NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1024-06
- PRODUCT NUMBER CODE:

DS1024-06 - X X X X

HOUSING COLOR
B:BLACK
CONTACT PLATING
8: FULL GOLD FLASH
CONNECTOR TYPE
S:SOCKET
No.OF CONTACTS
2*1-2*40

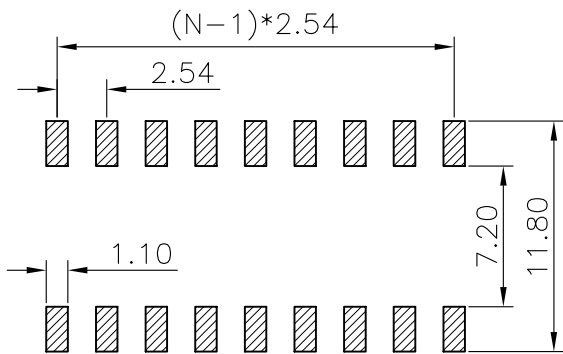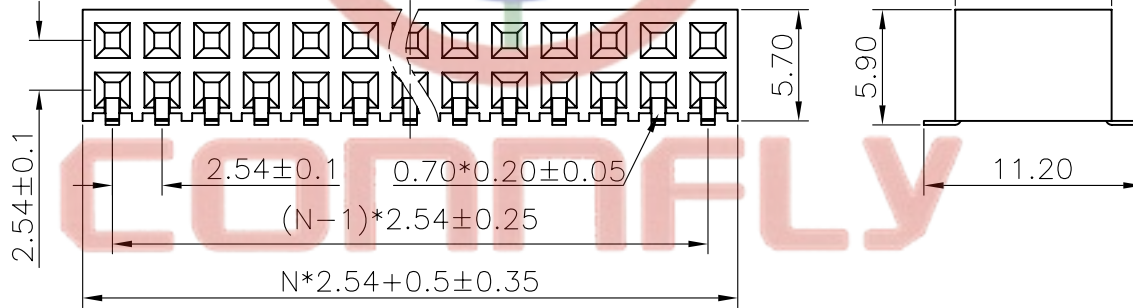

(TOLERANCE=±0.05)
RECOMMEND PCB LAYOUT

Tel:86-574-63508787
Fax:86-574-63510817
E-mail:sale@zhenqin.com.cn
Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FEMALE HEADER PITCH 2.54mm
X.	±0.60	X.	±5'	UNITS	mm	SMT TYPE	
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1024-06 SERIES
.XX	±0.25	.XX	±2'	DRAWING TYPE CUSTOMER			
SCALE		1:1	SHEET		1 OF 1		
DRAWING NO.		C-DS1024-06-XXXX					

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD