
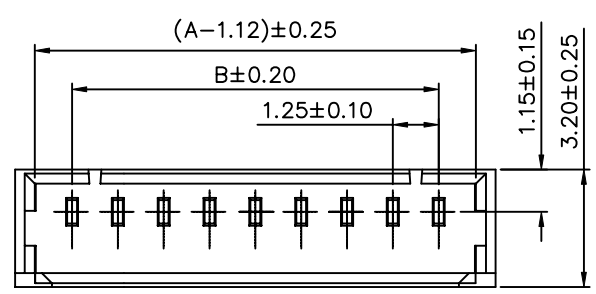
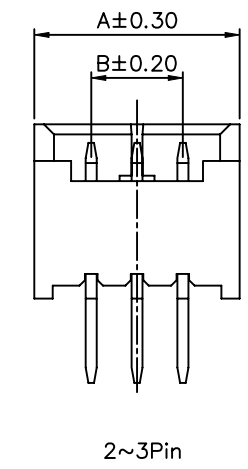
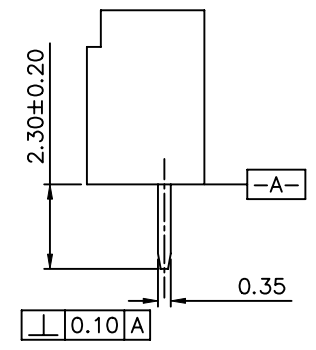
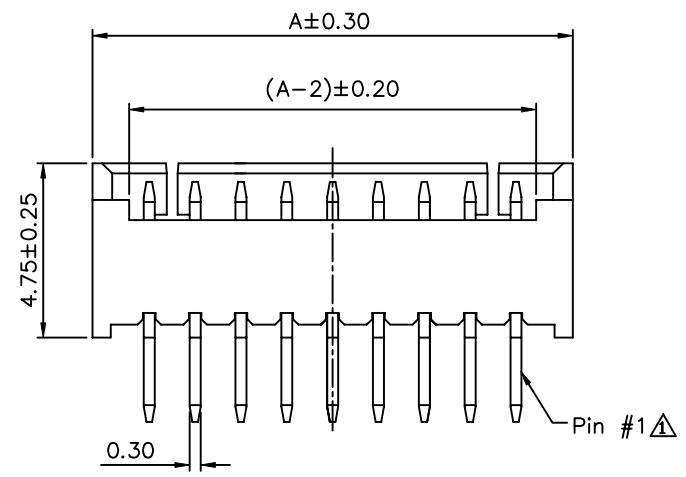


**SPECIFICATION**

Current Rating: 1A AC/DC  
 Voltage Rating: 125V AC/DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 500 Megaohms Min.  
 Withstanding Voltage: 500V AC/Minute  
 ⚠ Insulator: PA66+30%GF UL94V-0, Natural  
 Pin: Brass,  
 Underplated: Nickel  
 Whole Tin Plated  
 RoHS Compliant

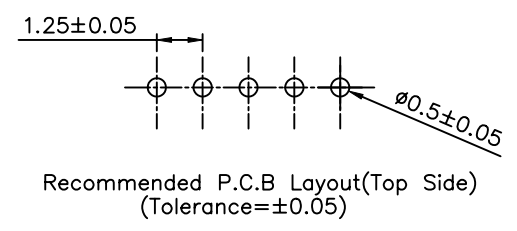

Pin	A	B
2	4.25	1.25
3	5.50	2.50
4	6.75	3.75
5	8.00	5.00
6	9.25	6.25
7	10.50	7.50
8	11.75	8.75
9	13.00	10.00
10	14.25	11.25
11	15.50	12.50
12	16.75	13.75
13	18.00	15.00
14	19.25	16.25
15	20.50	17.50
16	21.75	18.75

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ~10 ±0.15 20~30 ±0.30 30~ ±0.50 ANG ±2°
PART No. FHXXD-H		MEI		
DRAWING No. FHXXD-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY PEGA		
REV.	B1	UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
⚠ B1		Add Pin1 And Color	HZF	03/20/2009
⚠ B0		NEW RELEASE	HZF	12/05/2006