




SPECIFICATION

Current Rating:1.0 Amp  
 Voltage Rating:250V AC/DC  
 Withstand Voltage:500V AC/DC  
 Contact Resistance:10 Milliohms Max.  
 Insulation Resistance:100 Megaohms Min.  
 Operation Temperature:-25°C~+85°C  
 Insulator:LCP(UL94V-0)  
 Contact:Brass,Gold Flash Over All,Over Nickel  
 RoHS Compliant

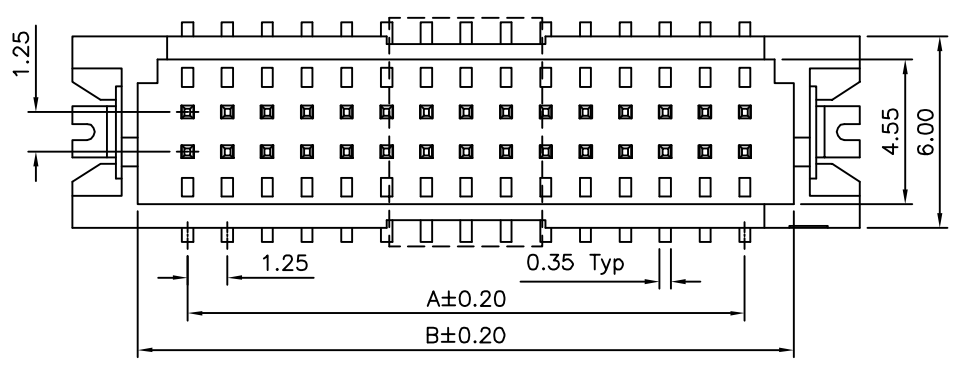

DFT 2 X XX V G C - RXXX - H  
 (1) (2) (3) (4) (5) (6) (7) (8)

- (1) DFT:1.25 DF13 Series
- (2) 2: Dual Row
- (3) XX: No. Of Position/Per Row
- (4) V: SMT Straight
- (5) G: Gold Flash Over All, Over Nickel
- (6) C: With Cap
- (7) RXXX: Tape & Reel
- (8) H: RoHS Compliant

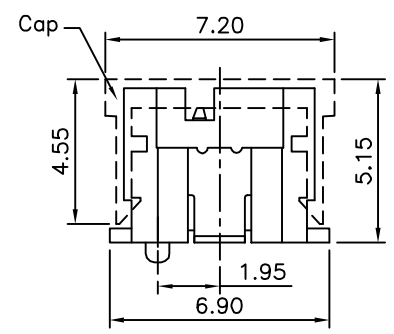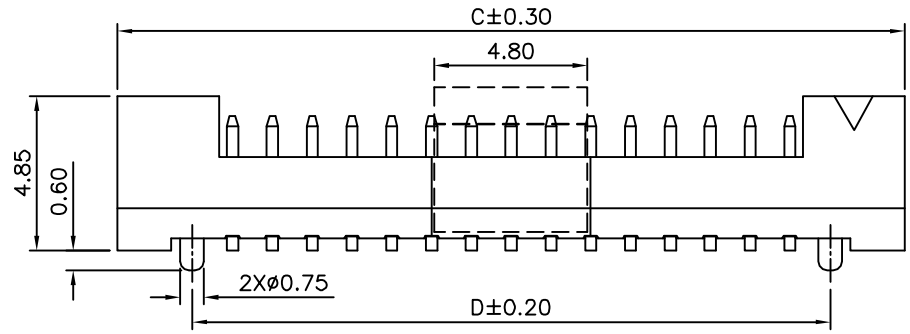

Pin	A	B	C	D	E
10	5.00	8.10	12.25	7.55	8.75
20	11.25	14.35	18.50	13.80	15.00
30	17.50	20.60	24.75	20.05	21.25
40	23.75	26.85	31.00	26.30	27.50



**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
PART No. DFT2XXXVGC-RXXX-H		EMILY		
DRAWING No. DFT2XXXVGC-RXXX-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY GAO		
REV.	A1	UNIT	mm	

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	12/05/2012
△	A0	NEW RELEASE	HZF	02/18/2012

**SPECIFICATION**

Material:Conductive Polystyrene,Black  
 Reel Size:2X05P:13"X24mm,2X10P 13"X32mm  
 Carrier Tape:2X05P:24X12800mm,2X10P:32X12800mm  
 Cover Tape:2X05P:21.3mm(Width),2X10P:25.5mm(Width)  
 RoHS Compliant

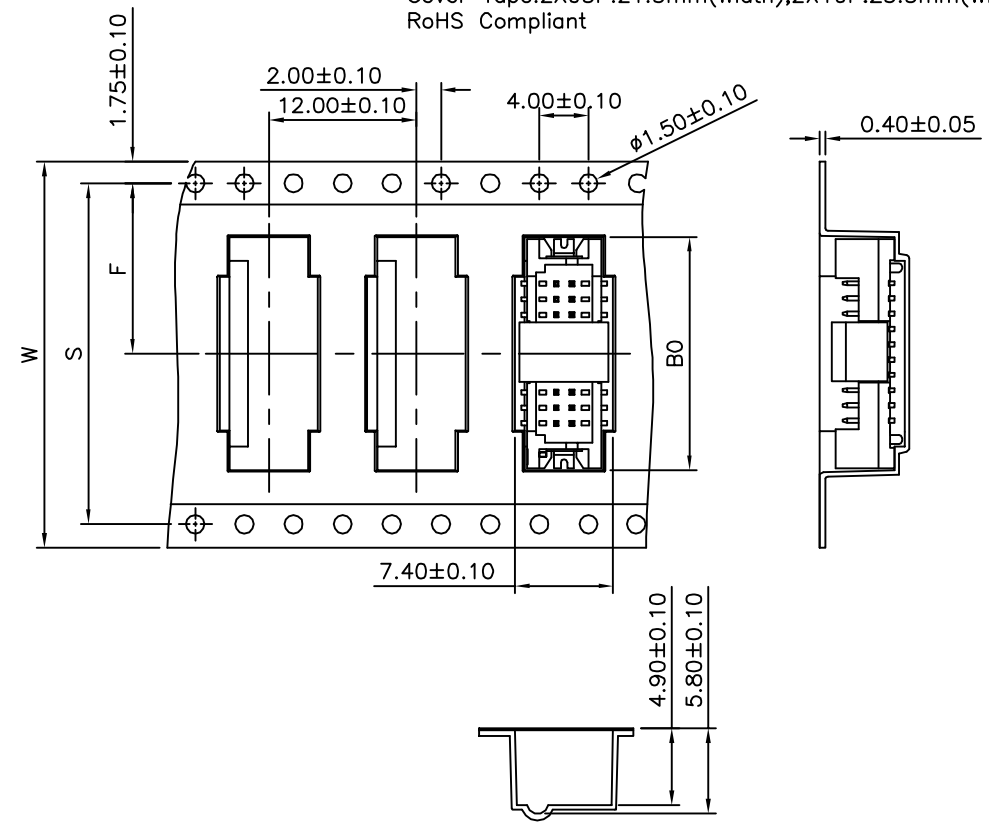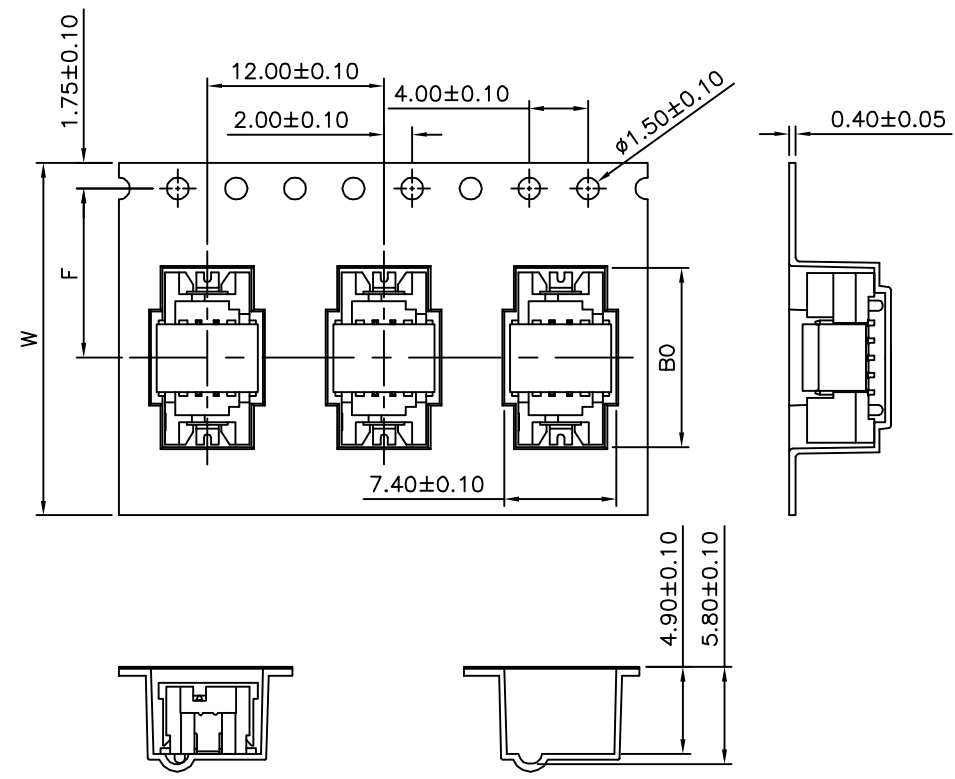

Pin	W	B0	F	S
2X05P	24.00±0.30	12.80±0.10	11.50±0.10	———
2X10P	32.00±0.30	19.10±0.10	14.20±0.10	28.40±0.10

P/N	No. Of Position/Per Row	Q'ty/Reel
DFT2X05VGC-R1K-H	05	1000 PCS
DFT2X10VGC-R1K-H	10	1000 PCS


**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY	
PART No.		EMILY	
DFT2XXXVGC-RXXX-H		CHECKED BY	
DRAWING No.		HZF	
DFT2XXXVGC-RXXX-H		DRAWING BY	
SCALE		GAO	
NONE	REV.	A1	UNIT
			mm

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.10  
 .XX ±0.05  
 .XXX ±0.02  
 ANG. ±2°

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	12/05/2012
△ A0		NEW RELEASE	HZF	02/18/2012

**SPECIFICATION**  
 Material: Conductive Polystyrene, Black  
 Reel Size: 13"X44mm  
 Carrier Tape: 44X13000mm  
 Cover Tape: 37.5mm (Width)  
 RoHS Compliant

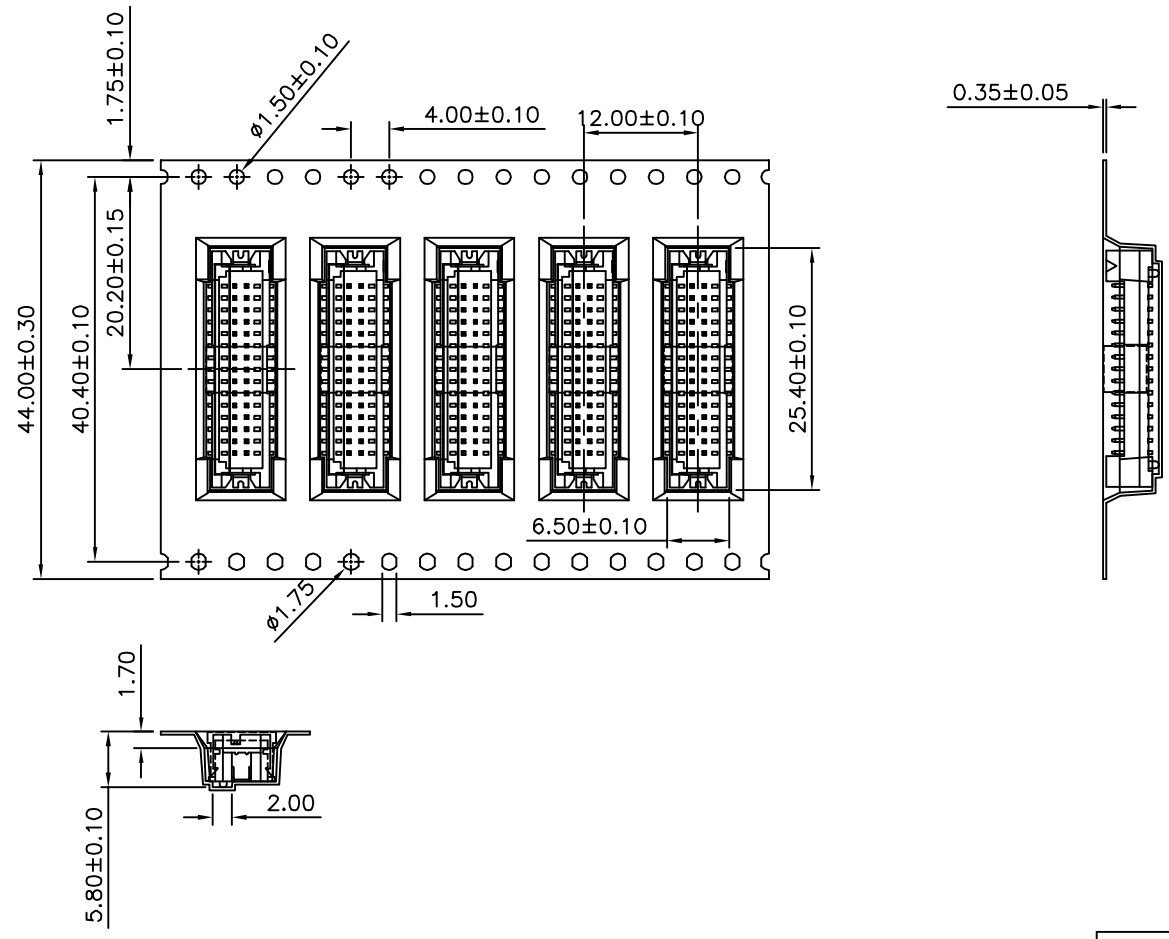

P/N	No. Of Position/Per Row	Q'ty/Reel
DFT2X15VGC-R1K-H	15	1000 PCS

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.20 .XX ±0.10 .XXX ±0.05 ANG. ±2°
PART No. DFT2XXXVGC-RXXX-H		CHECKED BY HZF		
DRAWING No. DFT2XXXVGC-RXXX-H		DRAWING BY GAO		
SCALE	NONE	REV.	A1	
UNIT mm				NO. REV.

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	12/05/2012
△	A0	NEW RELEASE	HZF	02/18/2012