
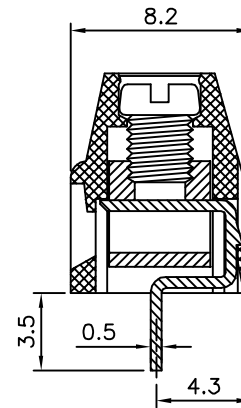
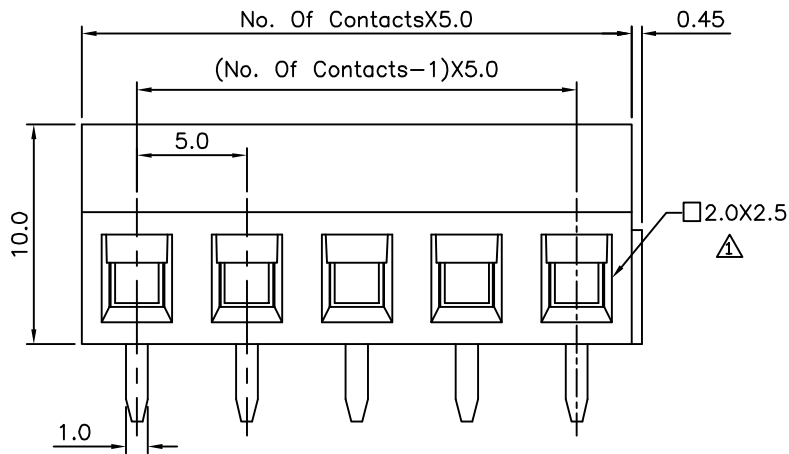


Recommended P.C.B. Layout

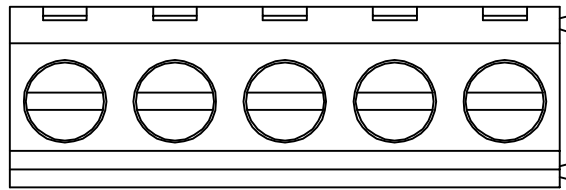

△ SPECIFICATION

Current Rating:16 Amp/Way Max.
 Voltage Rating:300V AC
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature:
 250°C±10°C/5s Max.
 Withsanding Voltage:2500V AC(1 Minute)
 Test Time=60s/1 PCS

- △ Wire Range:16~30 AWG
- △ Torque:4.5 Kgf.cm/M3.0
- △ Insulating Body(Housing):Polyamide(UL94V-0)
- △ Contact(Metal Housing):Copper Alloy,Nickel Plated
- △ Solder Pin:Copper Alloy,Tin Plated
- △ Terminal Screw:Steel,Galvanized With Cr3+ Plated
- △ RoHS Compliant

△△ TBH XX A - XX - H
 (1) (2) (3) (4) (5)

- (1) TBH:5.0mm Terminal Block Rising Clamp Type
- (2) XX:No. Of Position
- (3) A:Height=10mm
- (4) XX:Insulator Color
 Blank:Green
 BK:Black
 BL:Blue
 GE:Gray
- (5) H:RoHS Compliant

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
PART No. △ TBHXXA-XX-H		EMILY		
DRAWING No. TBHXXA-XX-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY CYP		
REV.	A4	UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
△ A4		Modify Data	HZF	12/04/2014
△ A3		Modify Spec.	HZF	06/14/2013
△ A2		Modify Spec.	HZF	12/15/2011
△ A1		Modify P/N: TBHXXA-H --> TBHXXA-XX-H	HZF	09/13/2011
△ A0		NEW RELEASE	HZF	11/13/2009