

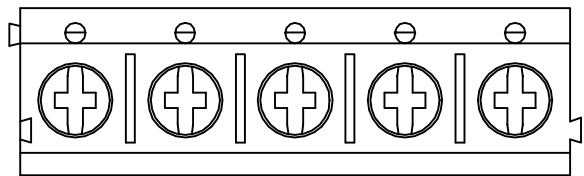


Recommended P.C.B. Layout

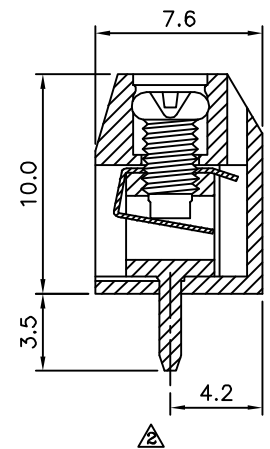

△

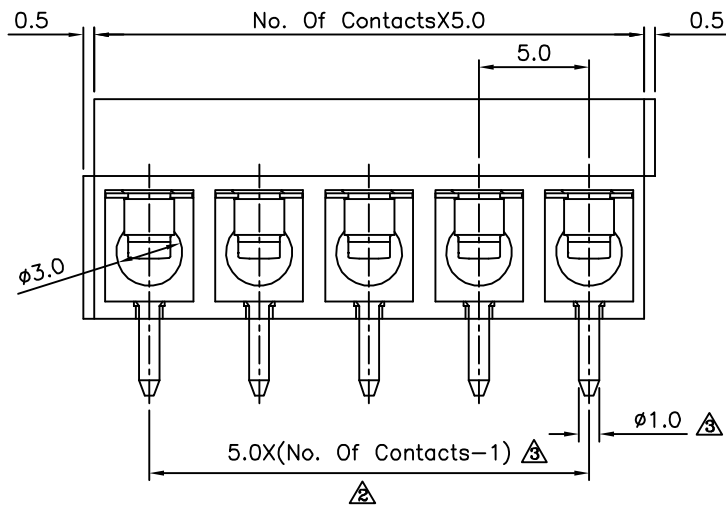

△△ SPECIFICATION

Voltage Rating:250V AC
 Current Rating:15 Amps/Way Max.
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2500V AC(1 Minute),Test Time=60s/1 PCS
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature:250°C±10°C 5s Max.
 Torque:4.0 Kgf.cm/M2.5
 Wire Range:14~24 AWG
 Terminal:Copper Alloy,Tin Plated
 Screw:Steel,Galvanized With Cr3+ Plated
 Wire Guard:Stainless Steel
 △ Insulator Body(Housing):Polyamide(UL94V-0)
 RoHS Compliant

△△ TBN XX A - XX - H
 (1) (2) (3) (4) (5)

- (1) TBN:5.0mm Terminal Block
Wire Protector Type
- (2) XX:No. Of Position
- (3) A:10mm Height
- (4) XX:Insulator Color
Blank:Blue
GR:Green
BK:Black
- (5) H:RoHS Compliant

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	
PART No. △ TBNXXA-XX-H		EMILY	
DRAWING No. △ TBNXXA-XX-H		CHECKED BY HZF	
SCALE		DRAWING BY HAO	
NONE	REV.	A4	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°

△ A4	Modify P/N Code	HZF	10/07/2014
△ A3	Modify Data	HZF	08/09/2013
△ A2	Modify Data	HZF	03/07/2011
△ A1	Modify P/N: TBNXXA-H --> TBNXXA-XX-H	HZF	10/13/2010
△ A0	NEW RELEASE	HZF	04/13/2009
NO. REV.	REVISIONS	CHK	DATE