
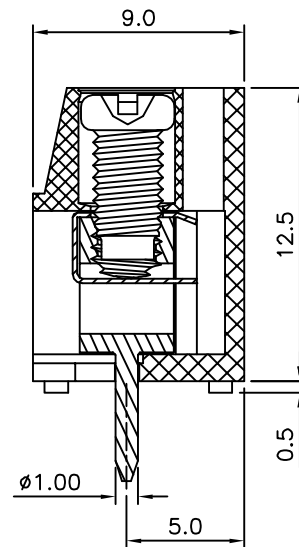


Recommend PCB Layout

SPECIFICATION

Voltage Rating:300V AC
 Current Rating:15A
 Solid Wire(AWG):14~22
 Stranded Wire(AWG):14~22
 Torque(Lb-In):3.5
 Screw:M3
 Wire Strip Length:6~7mm
 Withstanding Voltage:1.5KV
 Operation Temperature:-30°C~+105°C
 Soldering Temperature:250°C±10°C/5s
 Terminal Body(Metal Housing):Brass(CuZn)
 Terminal Screw:Steel,Zinc Plating,"+" Slot Type
 Wire Guard:Stainless Steel
 Surface Of Solder Tail:Tin Plated
 ⚠ Insulator (Housing):Thermoplastic(UL94V-0),Blue
 RoHS Compliant

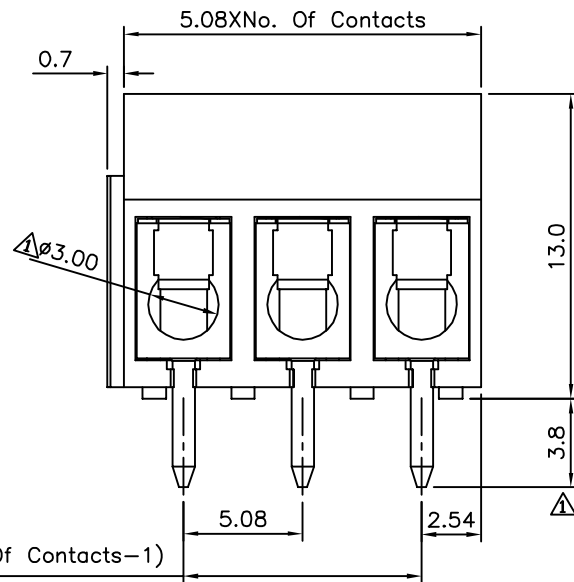

⚠ $\frac{TBN51}{(1)} \frac{XX}{(2)} \frac{D}{(3)} - \frac{H}{(4)}$

- (1) TBN51:5.08mm Terminal Block Wire Protector Type
- (2) XX:No. Of Position
- (3) D:DIP Straight
- (4) H:RoHS Compliant

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY	
PART No. TBN51XXD-H		CHECKED BY HZF	
DRAWING No. TBN51XXD-H		DRAWING BY GAO	
SCALE	NONE	REV.	B2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.50
 .XX ±0.30
 .XXX ±0.10
 ANG. ±1°
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠ B2		Modify Data	HZF	09/05/2012
⚠ B1		Modify Dip Length	HZF	09/26/2008
⚠ B0		NEW RELEASE	HZF	09/04/2007