







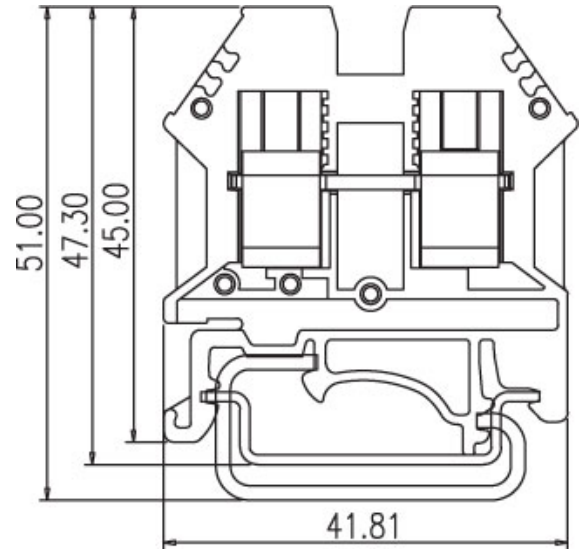

DIN Rail terminal blocks / DK..N series

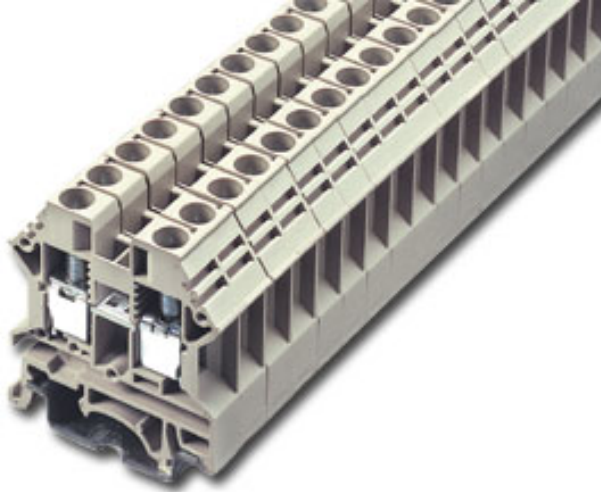

DK6N



Approval	 	
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	50A	41A
Conductor cross-section, solid (AWG / mm ²)	20~8 / 0.5~6	
Conductor cross-section, flexible (AWG / mm ²)	20~8 / 0.5~6	
Rated impulse withstand voltage	8KV	
Torque (N-m)	1.2	1.2
Screw	M4	
Wire strip length	12~14mm	
Insulating material	PA	
TxHxW (mm)	8 x 45 x 41.75	
Optional color	Cat. No.	
	DK6N-RD	
	DK6N-BL	
	DK6N-BK	
	DK6N-OR	



	Accessories	Cat. No.
End cover		DK6NC
Partition		
Small partition		DKNSPS-002
Insertion bridge	2 way	DSS6N-02P
	:	:
	:	:
Insertion bridge	10 way	DSS6N-10P
	:	:
	:	:
Insertion bridge	2 way	CSC-602P
	:	:
	:	:
Insertion bridge	10 way	CSC-610P
	:	:
	:	:
Screw-on bridge		
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		