


Leaded Common Mode Chokes – BCB Series

BCB Series


High Speed Data Line Filters

BCB0603RI-4R4-N

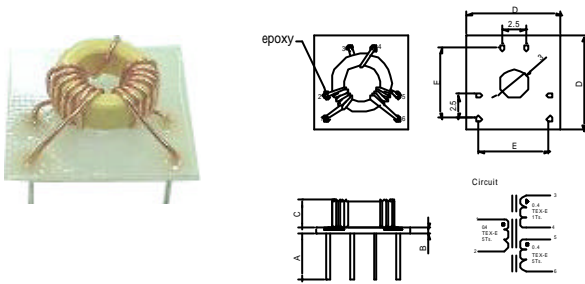


Dim (mm)	A	B	C	D	E
	5.0 ±1.0	0.5 ±0.05	6.0 ⁺⁰	10 ±0.5	7.5 ±0.5
Spec	L(1-2)(μ H)		L(3-4)(μ H)		L(5-6)(μ H)
	3.54~5.53		0.141~0.52		3.6~6.53

BCB1104RI-330-N

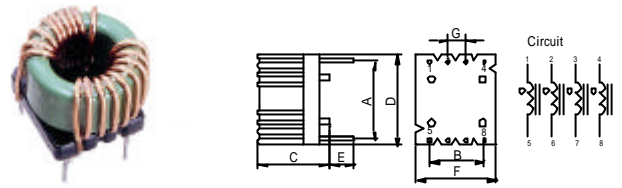


Dim (mm)	A	B	C	D	E	F	G
	10.8 ±0.5	7.62 ±0.5	8.89 ⁺⁰	12.45 ±0.5	3.5 ±0.5	10.92 ±0.5	2.5 ±0.15
Spec	L(μ H) @100KHz		LK(μ H) @1KHz	RDC ()	Interwinding Capacitance (p F)		
	25~50		1 ⁺⁰	0.07 ⁺⁰	30 ⁺⁰		

BCB1306RI-221-N

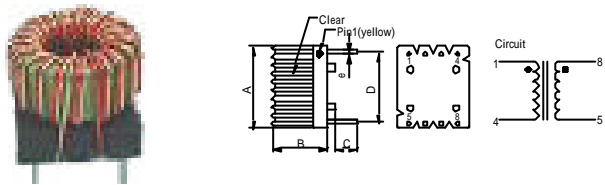

Dim (mm)	A	B	C	D	E
	16.0 ⁺⁰	12.7 ⁺⁰	3.48 ±0.5	10.8 ±0.5	0.65
Spec	L(μ H) @ 1KHz 1V		RDC (m)		
	220 ±30%		25 ⁺⁰		

BCB1306RI-221-N

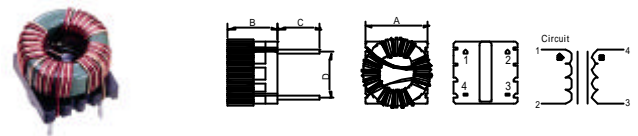

Dim (mm)	A	B	C	D
	15 ⁺⁰	12 ⁺⁰	3.5 ±1	7.8 ±0.2
Spec	L (mH)	RDC ()	Hi-Pot (V)(AC&DC)	
	1.5 ⁰	0.11	650	