

Vectron International**Filter specification****TFS 600****1/5****Measurement condition**

Ambient temperature:	23	°C
Input power level:	0	dBm
Terminating impedance: *		
Input:	270 Ω	-0,8 pF
Output:	285 Ω	-0,8 pF

Characteristics**Remark:**

The nominal frequency f_N is fixed at 600 MHz. The insertion loss a_e is defined as loss value determined at f_N . Reference level for the relative attenuation a_{rel} of the TFS 600 is the insertion loss a_e . The centre frequency f_c is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . All specified data are met within the operating temperature range.

D a t a	typ. value	tolerance / limit
Insertion loss (reference level)	a_e	3,9 dB max. 6,5 dB
Nominal frequency	f_N	- 600,0 MHz
Centre frequency	f_c	600,0 MHz -
Passband	PB	$f_N \pm 16$ kHz
Pass band ripple	p-p	0,0 dB max. 1 dB
Relative attenuation	a_{rel}	
$f_N \pm 0,8$ MHz ... $f_N \pm 5$ MHz	0,2 dB	max. 1 dB
$f_N \pm 5$ MHz ... $f_N \pm 20$ MHz	40 dB	min. 20 dB
	52 dB	min. 30 dB
Return loss within PB	1.6:1	min. 2:1
Input power level	-	max. 3 dBm
Operating temperature range	OTR	- 5 °C ... + 70 °C
Storage temperature range	-	- 30 °C ... + 80 °C
Frequency inversion temperature	22 °C	
Temperature coefficient of frequency	TC_f^{**}	-0,036 ppm/K ² -

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.



**) $\Delta f(\text{Hz}) = TC_f(\text{ppm/K}^2) \times (T - T_0)^2 \times f_{cat}(\text{MHz})$.

Generated:**Checked / Approved:**

Vectron International GmbH & Co. KG
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com


Vectron International GmbH & Co. KG reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Filter characteristic

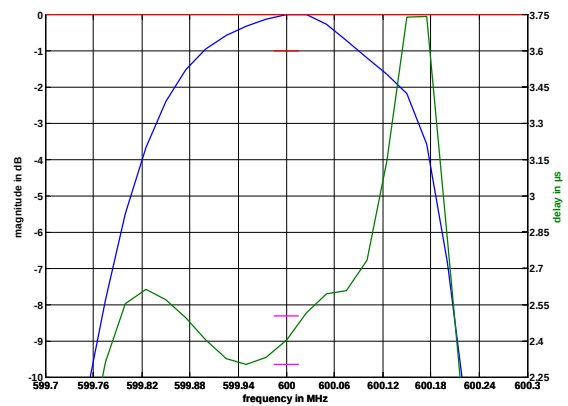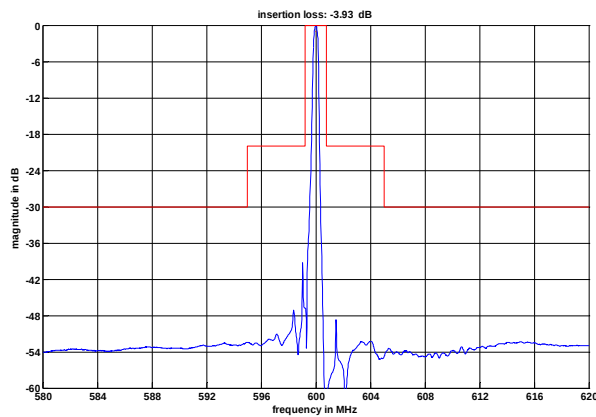

Construction and pin connection

(All dimensions in mm)

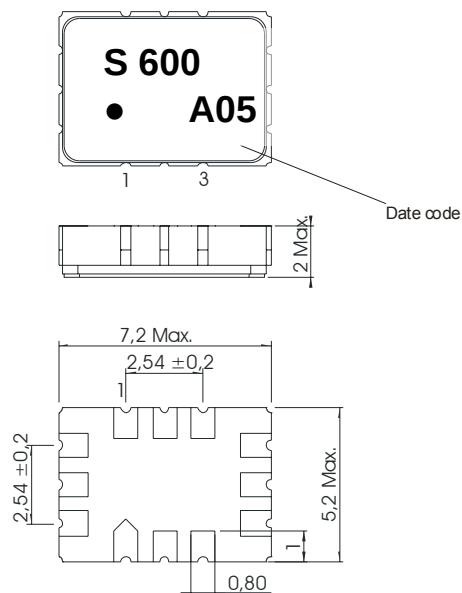

1	Output
2	Ground
3	Ground
4	Ground
5	Ground
6	Ground
7	Input
8	Ground
9	Ground
10	Ground
11	Ground
12	Ground

Date code: Year + week


A 2010

B 2011

C 2012

...

50 Ohm Test circuit

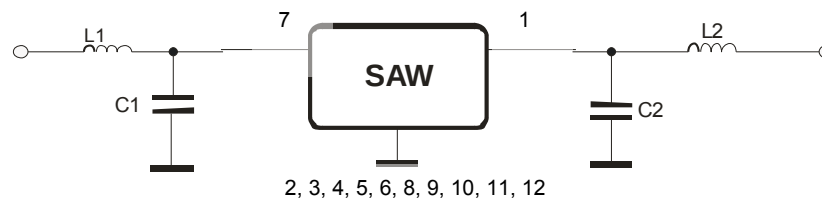

Vectron International GmbH & Co. KG

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tft@vectron.com

Vectron International GmbH & Co. KG reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Stability characteristics, reliability

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5 g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: three times max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;

This filter is RoHS compliant (2002/95/EG, 2005/618/EG)


Packing

Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;


max. pieces of filters per reel:	3000
reel of empty components at start:	min. 300 mm
reel of empty components at start including leader:	min. 500 mm
trailer:	min. 300 mm

Tape (all dimensions in mm)

W	: 16,00 ± 0,3
Po	: 4,00 ± 0,1
Do	: 1,50 +0,1/-0
E	: 1,75 ± 0,1
F	: 7,50 ± 0,1
G(min)	: 0,60
P2	: 2,00 ± 0,1
P1	: 8,00 ± 0,1
D1(min)	: 1,50
Ao	: 5,50 ± 0,1
Bo	: 7,50 ± 0,1
Ct	: 13,5 ± 0,1

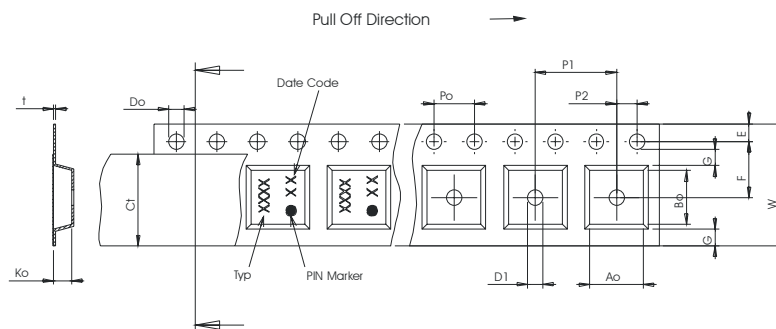**Reel (all dimensions in mm)**

A	: 330
W1	: 16,4 +2/-0
W2(max)	: 22,4
N(min)	: 50
C	: 13,0 +0,5/-0,2

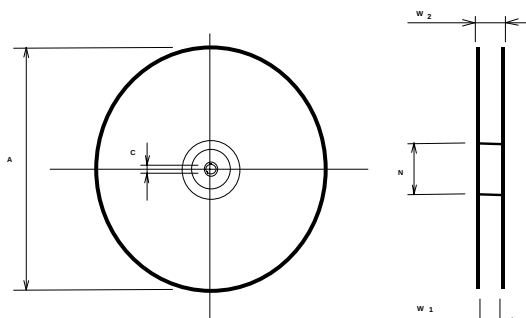

The minimum bending radius is 45 mm.

Vectron International GmbH & Co. KG

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30


E-Mail: tft@vectron.com

Vectron International GmbH & Co. KG reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

Conditions	Exposure
Average ramp-up rate (30°C to 217°C)	less than 3°C/second
> 100°C	between 300 and 600 seconds
> 150°C	between 240 and 500 seconds
> 217°C	between 30 and 150 seconds
Peak temperature	max. 260°C
Time within 5°C of actual peak temperature	between 10 and 30 seconds
Cool-down rate (Peak to 50°C)	less than 6°C/second
Time from 30°C to Peak temperature	no greater than 300 seconds

Chip-mount air reflow profile

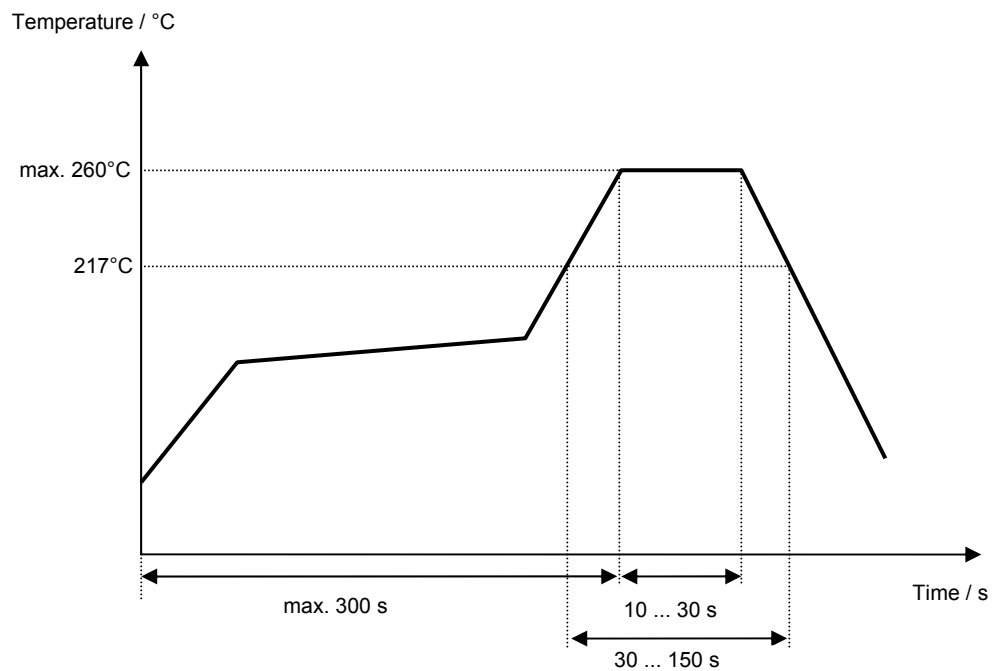

Vectron International GmbH & Co. KG

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tft@vectron.com

Vectron International GmbH & Co. KG reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Vectron International**Filter specification****TFS 600****5/5****History**

Version	Reason of Changes	Name	Date
1.0	Generated according to customer requirement	Dr. Wall	20.12.2000
1.1	Add off terminating impedances	Pfeiffer	01.03.2001
1.2	- filter characteristics added - specification updated	Pfeiffer	26.01.2010

Vectron International GmbH & Co. KG**Potsdamer Straße 18****D 14 513 TELTOW / Germany****Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30****E-Mail: tft@vectron.com**

Vectron International GmbH & Co. KG reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.