

# VI TELEFILTER

## Filter specification

TFS 70H35

1/5

### Measurement condition

Ambient temperature:	23	°C
Input power level:	0.	dBm
Terminating impedance: *		
Input:	450 Ω    -26,3 pF	
Output:	450 Ω    -29,3 pF	

### Characteristics

#### Remark:

The reference level for the relative attenuation  $a_{rel}$  of the TFS 70H35 is the minimum of the pass band attenuation  $a_{min}$ . The minimum of the pass band attenuation  $a_{min}$  is defined as the insertion loss  $a_e$ . The centre frequency  $f_c$  is the arithmetic mean value of the upper and lower frequencies at the 20 dB filter attenuation level relative to the insertion loss  $a_e$ . The nominal frequency  $f_N$  is fixed at 70 MHz without any tolerance. The temperature coefficient of frequency  $TC_f$  is valid both for the reference frequency  $f_c$  and the frequency response of the filter in the operating temperature range. The frequency shift of the filter in the operating temperature range is not included in the production tolerance scheme.

D a t a		typ. value		tolerance / limit		
<b>Insertion loss</b> (reference level)		$a_e$	23,5 dB	max.	25	dB
<b>Nominal frequency</b>		$f_N$	-		70,0	MHz
<b>Centre frequency</b>		$f_c$	70,0 MHz	±	0,1	MHz
<b>Passband</b>		PB	-	$f_c$ ±	3,0	MHz
<b>Pass band ripple</b>			0,5 dB	max.	1	dB
<b>Bandwidth</b>		BW				
1	dB		5,85 MHz	min.	5,6	MHz
3	dB		6,31 MHz	min.	6	MHz
20	dB		7,0 MHz			
45	dB		8,0 MHz	max.	8,4	MHz
50	dB		8,2 MHz			
<b>Relative attenuation</b>		$a_{rel}$				
$f_c$		$f_c$ ± 2,8 MHz	-	max.	1	dB
$f_c$ ± 2,8 MHz		$f_c$ ± 3,0 MHz	-	max.	3	dB
$f_c$ ± 4,2 MHz		$f_c$ ± 8,0 MHz	55 dB	min.	45	dB
$f_c$ ± 8,0 MHz		$f_c$ ± 40,0 MHz	67 dB	min.	50	dB
<b>Group delay</b>		mean value in PB	3,0 µs		-	
<b>Group delay ripple within PB</b>			100 ns	max.	130	ns
<b>Deviation from linear phase within PB</b> (p-p)			2,7 °	max.	6°	
<b>Operating temperature range</b>		OTR	-		- 25 °C ... + 80 °C	
<b>Storage temperature range</b>			-		- 40 °C ... + 85 °C	
<b>Temperature coefficient of frequency</b>		$TC_f$ **	- 18 ppm/K		-	

\*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

\*\*)  $\Delta f_c(\text{Hz}) = TC_f(\text{ppm/K}) \times (T - T_0) \times f_{CAT}(\text{MHz})$ .

Generated:

Checked / Approved:

Tele Filter GmbH  
Potsdamer Straße 18  
D 14 513 TELTOW / Germany  
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30  
E-Mail: [tft@vectron.com](mailto:tft@vectron.com)

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.



# VI TELEFILTER

## Filter specification

TFS 70H35


2/5

### Filter characteristic

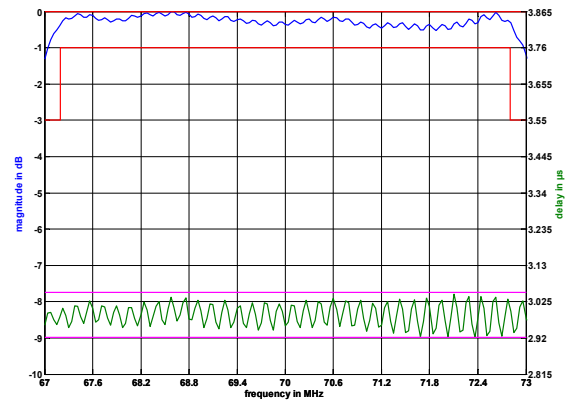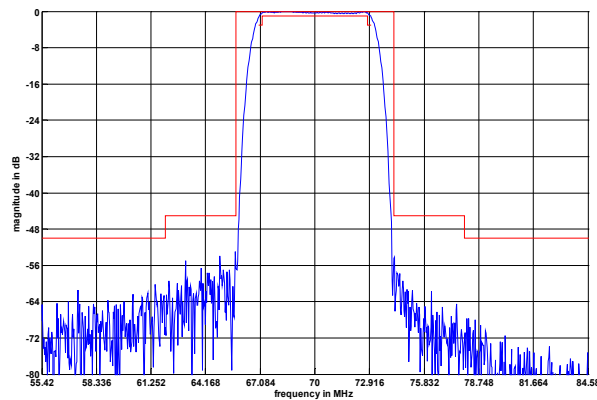


### Construction and pin connection

(All dimensions in mm)

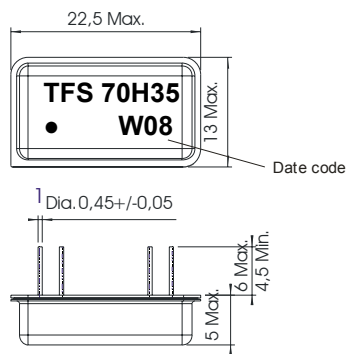


- |    |                  |
|----|------------------|
| 1  | Input RF Return  |
| 2  | Ground           |
| 7  | Output RF Return |
| 8  | Output           |
| 9  | Ground           |
| 14 | Input            |



Date code: Year + week  
W 2008  
X 2009  
A 2010  
...

### 50 Ω Test circuit

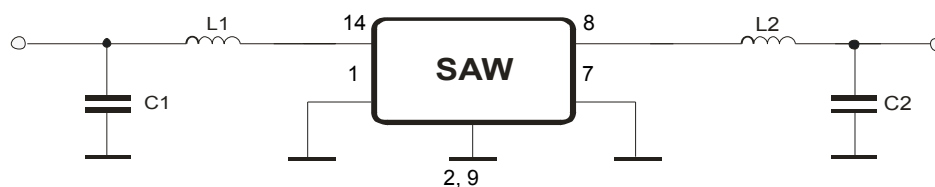

Tele Filter GmbH  
Potsdamer Straße 18  
D 14 513 TELTOW / Germany  
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30  
E-Mail: [tft@vectron.com](mailto:tft@vectron.com)

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

**VI TELEFILTER****Filter specification****TFS 70H35****3/5****Stability characteristics, reliability**


After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 1 ms, half sine wave, 3 shocks each plane;  
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5 g respectively, 1 octave per min, 10 cycles per plan, 3 plans;  
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles  
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: three times max.;  
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;

This filter is RoHS compliant (2002/95/EG, 2005/618/EG)

**Air reflow temperature conditions**

Conditions	Exposure
Average ramp-up rate (30°C to 217°C)	less than 3°C/second
> 100°C	between 300 and 600 seconds
> 150°C	between 240 and 500 seconds
> 217°C	between 30 and 150 seconds
Peak temperature	max. 260°C
Time within 5°C of actual peak temperature	between 10 and 30 seconds
Cool-down rate (Peak to 50°C)	less than 6°C/second
Time from 30°C to Peak temperature	no greater than 300 seconds

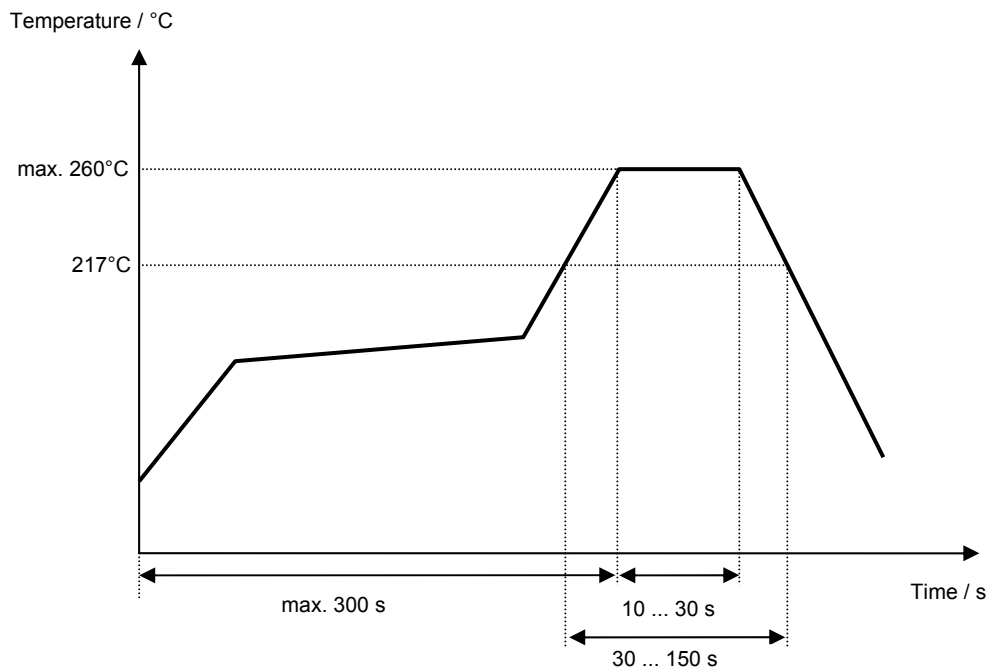**Chip-mount air reflow profile**

**VI TELEFILTER****Filter specification****TFS 70H35****5/5****History**

<b>Version</b>	<b>Reason of changes</b>	<b>Name</b>	<b>Date</b>
1.0	Generate filter specification	Dunzow W.	23.07.2002
1.1	- change of temperature coefficient and stability characteristics	Pfeiffer	22.02.2008